

# REKCI® User Guide

## BLUETOOTH TRACKER



\*3rd Party App Required

# Table Of Contents

<b>Overview</b> .....	<b>1.</b>
<b>Scope Of Delivery</b> .....	<b>2.</b>
Components .....	2.
<b>General Information</b> .....	<b>3.</b>
Reading And Storing The User Guide .....	3.
Intended Use .....	3.
Explanation Of Symbols .....	4.
<b>Safety</b> .....	<b>5.</b>
Explanation Of Instructions .....	5.
<b>General Safety Instructions</b> .....	<b>6.</b>
<b>Product Description</b> .....	<b>8.</b>
Description .....	8.
<b>Setup</b> .....	<b>9.</b>
Product Test .....	9.
3rd Party Software Disclaimer .....	9.
Downloading The App .....	10.
<b>Use</b> .....	<b>11.</b>
Pairing The Tracker .....	11.
Setting Up The Tracker .....	12.
Device Picture .....	12.
Naming The Tracker .....	13.
Activating The Bluetooth Alarm .....	13.
Select Ringtone .....	13.
Removing A Tracker .....	14.
Camera .....	14.
Location .....	15.
Lost History .....	15.
Settings .....	16.
WiFi Do Not Disturb .....	16.
Silent Period .....	16.
Recording Settings .....	17.
About Software .....	17.
Description .....	17.

Turning On/Off The Tracker .....	18.
Sounding The Alarm .....	18.
Turn Off The Sounding Alarm .....	18.
Find You Phone .....	18.
<b>Product Care</b> .....	<b>19.</b>
Storing .....	19.
Cleaning .....	19.
Replacing The Battery .....	20.
<b>Technical Data</b> .....	<b>21.</b>
<b>Declaration Of Conformity</b> .....	<b>21.</b>
<b>Disposal</b> .....	<b>22.</b>
Disposing Of The Packaging .....	22.
Disposing Of The Device .....	22.

---

## Overview

Congratulations!

You have made an excellent choice with the purchase of this quality REKA® product.

By doing so you now have the assurance and peace of mind which comes from purchasing a product that has been manufactured to the highest standards of performance and safety, supported by the high quality standards of Qesh Ltd.

We want you to be completely satisfied with your purchase, so this REKA® product is backed by a comprehensive manufacturer's 3 year warranty and outstanding after sales service through our dedicated helpline.

We hope you enjoy using this product for many years to come.

If you require technical support or in the unlikely event that your purchase is faulty, please telephone our helpline for immediate assistance. Faulty product claims made within the 3 year warranty period will be repaired or replaced free of charge provided that you have a satisfactory proof of purchase.  
(keep your receipt safe)

This does not affect your statutory rights. However be aware that the warranty will become null and void if the product is found to have been deliberately damaged, misused and/or disassembled.

## Scope Of Delivery



### Components

- 1 Bluetooth Tracker
- 2 CR2032 Coin Battery

## General Information

This user guide is based on the standards and regulations that are valid within the European Union. Also the country specific directives and laws outside of the EU.

### Reading and storing the user guide



This user guide belongs to this Bluetooth Tracker (referred to as the “product” below). It contains information on how to setup and use the product. Read the user guide carefully, in particular the safety instructions before using the product. Failure to follow this user guide may lead to severe injury or product damage.

### Intended Use

This product is exclusively designed to be tracked by compatible smart phones. This product is not intended for commercial use.

Only use the product as described in this user guide. Any other use other than directed may lead to damage of the product or equipment and even possible injury. The manufacturer or retailer assume no liability of damaged caused by improper or incorrect use.

This product IS NOT a toy.

## Explanation of symbols

The following symbols are used on the product and packaging:



This symbol indicates additional information on the assembly or operation of the product.



This symbol refers to the declaration of conformity. Products marked with this symbol meet all the applicable community regulations of European economic area.



This symbol refers to the disposal of waste electrical and electronic equipment according to Directive 2012/19/EU of the European Parliament and of the Council. The device and the batteries must not be disposed of together with domestic waste. If you want to dispose of the device, do it the environmentally friendly way by bringing it and the batteries to a public collection point.



This symbol refers to the box packaging.  
The card used is made from widely recycled material.

# Safety

## Explanations of instructions

The following symbols and signal words are used in this user guide.

**⚠WARNING!**

This symbol denotes situations that could cause injury to yourself or others.

**⚠CAUTION!**

This symbol denotes situations that could cause damage to the product or equipment as well as possible injury to yourself.

**NOTE!**

This symbol denotes important information or advice regarding the correct use of the product.

---

## General Safety Instructions

Please read this important safety information before you use this product. The following warning and caution information is to prevent injury to yourself or others and to prevent damage to your product or equipment.

 **WARNING!**

### Risk of electric shock!

Failure to comply with safety warnings and regulations can cause serious injury or death.

- DO NOT operate this product with wet or damp hands or other body parts.
- DO NOT immerse the product in water or other liquids or expose them to damp or moist conditions.
- DO NOT open the housing; have repairs performed by qualified professionals. Contact the service centre. No liability is assumed and warranty claims shall be void in the case of unauthorised repairs, improper connection or incorrect operation.
- DO NOT drop this product.
- DO NOT place this product on or in a heating device, such as a microwave, oven, stove, or radiator. This product may explode when overheated.
- Avoid exposing your product to very cold or very hot temperatures. Extreme temperatures can damage the product and reduce the charging capacity and life of the installed battery.
- DO NOT directly connect the positive and negative terminals. Doing so will cause the product to malfunction.
- DO NOT leave children unsupervised with this product. It is not a toy.

**▲CAUTION!**


Failure to comply with safety cautions and regulations can cause injury or property damage.

- Medical implants need to be kept at least a minimum distance of 15.3cm. IF you suspect that the bluetooth feature has interfered with your implant, consult the relevant medical personal.

**NOTE!**

- Handle and dispose of this product with care. Never dispose of this product in a fire. Never crush or puncture the product. Contact your local council for safe disposal of this product as it contains a Li-Ion battery.

# Product Description

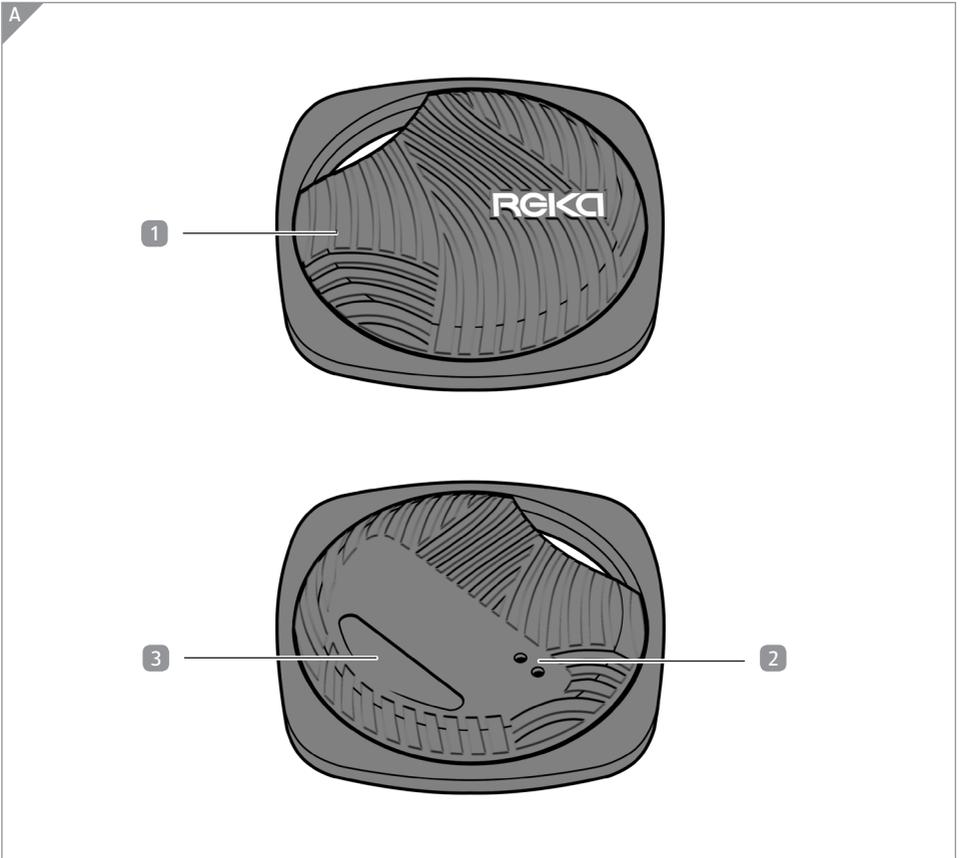

## Description

- 1 Battery Cover
- 2 Speaker
- 3 Button

# Setup

Check the Bluetooth Tracker before it's first use to ensure you get the best experience of the product out of the box.

### Product Test

To test the battery, press and hold the button **A** **3** until you hear 2 beeps. Enable your bluetooth mode on your smart phone and search your available device list for 'REKA', but do not pair. If the tracker shows in the list, it is working correctly. Press and hold the button **A** **3** until you hear a long beep to turn it off.

### 3rd Party Software Disclaimer

We may recommend use of software, information, products, or websites that are owned or operated by other companies. We offer or facilitate this recommendation by hyperlinks or other methods to aid your access to the third-party resource. While we endeavour to direct you to helpful, trustworthy resources. We cannot endorse, approve or guarantee software, information, products, or services provided by a third-party resource or track changes within the resource. Thus we are not responsible for the content or accuracy of any third-party resource, any loss or any damage resulting from the use of or for any failure of products or services provided from a third party resource. We recommend these resources on an "as is" basis. When you use a third party resource, you will be subject to its terms and licenses. You should familiarize yourself with any license or terms of use, the privacy policy and the security practices of the third party resource, which will govern your use of that resource. In no event shall we be liable to you or any third parties for any special, punitive, incidental, indirect or consequential damages of any kind. Further more in no event shall we also be held liable for any damages whatsoever including, without limitation, those resulting from loss of use, loss of data, loss of profits or any liability, arising out of or in connection with the use of this third-party software.

## Downloading The App

Please search for, download and install to your smart phone one of the following:




iSearching



for iOS



iSearching Pro



for Android OS


Lenze Technologies Co. Ltd

App Developer: Lenze Technologies Co. Ltd.  
App Support: shenzhenlenze@gmail.com  
Website: <http://www.lenzetech.com>


# Use

## Pairing The Tracker

On the first time use of the iSearching or iSearching Pro app you will be asked for permissions to access and use your smart phone resources. Please allow these permission in order to get the best from the app and product.

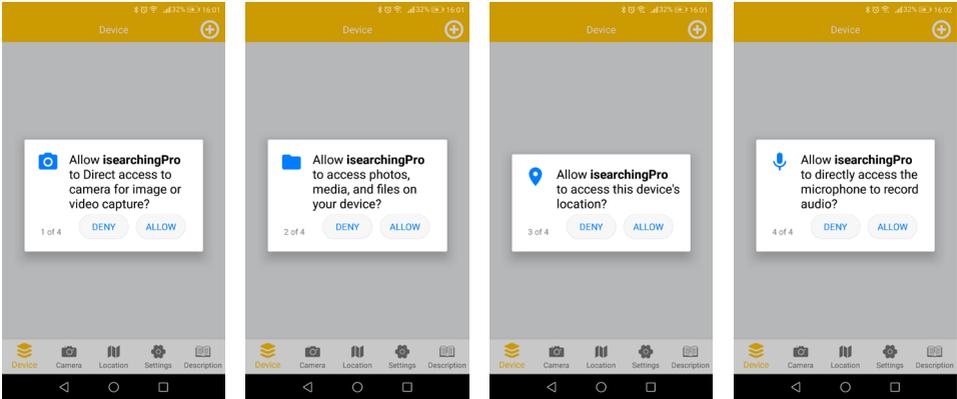



Turn on the tracker by pressing and hold the button **A 3** until you hear 2 beeps. Next, press the '+' in the top right corner of the screen on your smart phone and swipe down to begin searching for the tracker. Once the search is complete it will display the list of available trackers. Double tap 'Unconnected' to pair the tracker with the app. The tracker will automatically pair with the app once initially paired.

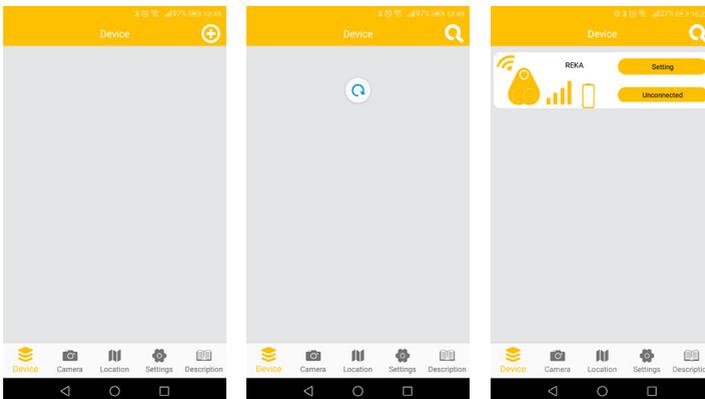

**i** It is possible to pair up to 4 trackers to this app.


## Setting Up The Tracker

On the app's home screen, select 'Setting' to access the options for setting up the tracker.

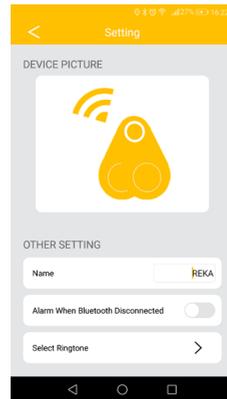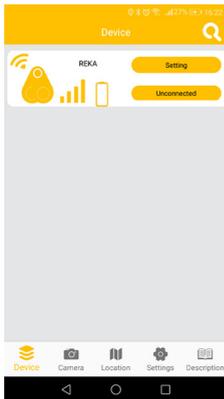

## Device Picture

Tap the device picture image to take open the camera function.

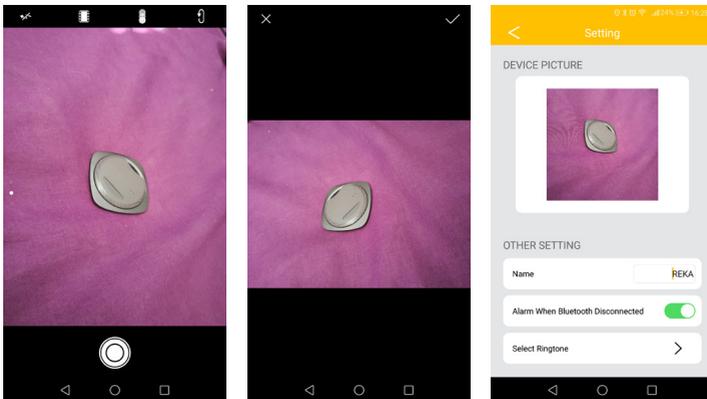

Tap the shutter button at the bottom of the screen to take a photo. Next, press the ✓ to confirm the image to use or retake the image by pressing the ✕ to go back to the camera mode. When the image is confirmed it will now be displayed as the device picture.

### Naming The Tracker


To give the tracker a unique or descriptive name, select the box to the right of 'Name', which will automatically be filled in with 'REKA'. Type in the box to give the tracker an appropriate descriptive name, e.g. 'keys'.

### Activate The Bluetooth Alarm

Tap the slider on the right of 'Alarm When Bluetooth Disconnected' to activate the proximity alarm indicated by the slider turning green. This feature will cause your smart phone to ring when the bluetooth is disconnected from being out of range. This is used as a helpful reminder and a theft deterrent device.

### Select Ringtone

There are a few different ringtone that can be assigned to a tracker. Tap > to the right of 'Select Ringtone' to access the list of ringtones.

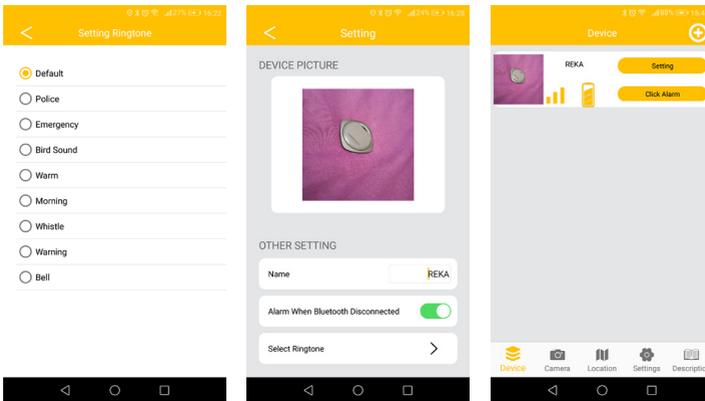


Tapping a ringtone will automatically playback the current selected ringtone, indicated by a dot in the radio button. To complete your selection tap the < button at the top left of the screen to return to the tracker screen.

Tap the < button to return to the tracker list screen to complete setting up the tracker.

## Removing A Tracker

To remove a tracker, swipe left on a listed tracker to reveal the 'Delete' option. Tap 'Delete' to remove the tracker from the app.

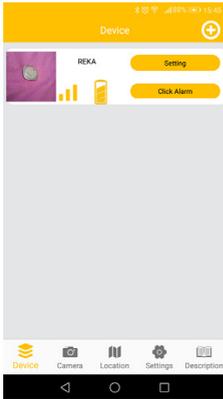


## Camera

Tap the camera  button at the bottom of the screen to access the basic camera function. This will function the same as the smart phones camera app.



### Location

Tap the location  button at the bottom of the screen to access the location function. As long as your smart phone has access to a WiFi spot or Mobile Internet, it can record the approximate location of your phone and in turn the tracker. Make sure your smart phone 'Location Information' is active to use this feature.

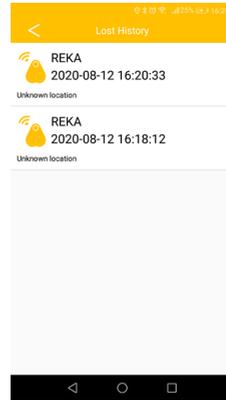


Tap the  button at the top right corner of the map to find your current location. When the tracker loses Bluetooth signal, the smart phones position will also be recorded under the 'Lost History' screen.

### Lost History

A record is made every time the tracker loses Bluetooth connectivity to the smart phone. Tap the 'Lost History' button to show the trackers history. On this screen you can tap on a listed record to reveal a location marker on the map.

## Settings

Tap the setting  button at the bottom of the screen to access the app settings. The functions on this screen denote the global behaviour of the app.


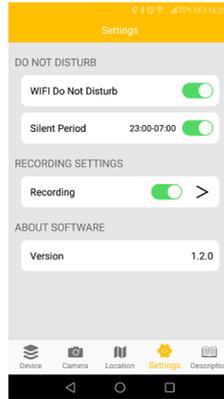


### WIFI Do Not Disturb

The 'Do Not Disturb' toggle option under the 'DO NOT DISTURB' header will turn on or off all the tracker alarms. This means that no bluetooth alarm will sound if you are out of range.

### Silent Period

The 'Silent Period' toggle option under the 'DO NOT DISTURB' header, when toggled to active, will open the 'Silent Period' screen where you can set the inactive time period.

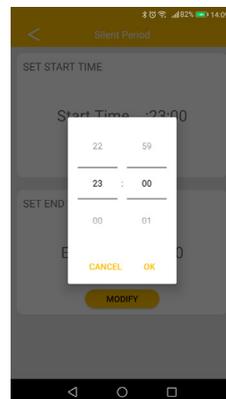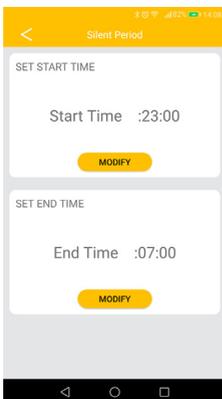

Tap 'Modify' to change the start and end times. Swipe up or down to change the hours and minutes and tap 'Ok' to confirm settings.

## Recording Settings

This function is not compatible with this tracker.

## About Software

This shows the current version of the software in use.

 Updates are at the discretion of the app developer.

## Description

Tap the setting  button at the bottom of the screen to access the inbuilt basic user guide provided by the app developer.



### Turning On/Off The Tracker

To turn on the tracker, press and hold the button **A 3** until you hear 2 beeps.  
To turn off the tracker, press and hold the button **A 3** until you hear a long beep.

### Sounding The Alarm

The range of the tracker is approximately 10m. When the tracker is out of Bluetooth range, the smart phone will begin to ring. When the tracker loose connectivity to the app, the tracker's alarm will start to sound. You can manually sound the tracker's alarm by tapping 'Click Alarm' on the 'Device'  screen.



### Turn Off The Sounding Alarm

When the trackers alarm is sounding you can turn it off by giving the button **A 3** a quick press.

### Find Your Phone

It is possible to activate the ringer on the smart phone by giving the tracker's button **A 3** a quick double press.

An alternative way to find your smart phone is to turn off the tracker ONLY if the app is active by pressing and holding **A 3** until you hear a long beep. Once the tracker is turned off the smart phone will ring as if the tracker has gone out f range.

 This feature only works with a compatible a smart phone.

## Product Care

Please read this important product care information before you store or clean this product. The following information is to prevent damage to your product and to keep it in good working condition.

### Storing

It is recommended for long term storage that you do the following:

- DO NOT place heavy items on top of the alarm clock.
- DO NOT store the speaker in direct sunlight.
- Always remove the internal battery in case of leakage and/or corrosion.
- Always store the speaker in a dry ambient temperature place (0°C - 45°C).

### Cleaning


It is recommended that to clean your product you do the following:

- Use a damp lint free cloth to wipe over the housing of the alarm clock.
- DO NOT use chemicals or detergents.
- DO NOT attempt to clean the terminals in the charge port.

**i** Chemicals and detergents can corrode the alarm clock's housing and could damage the product if there is any liquid ingress.

## Replacing The Battery

This tracker uses a CR2032 3V battery. This battery lasts typically for about ?? days. To replace the battery, insert a small screwdriver in the groove of the battery cover found on the loop corner of the tracker. Leaver the screwdriver down to release the clips of the battery cover. Remove the cover to expose the battery bay.

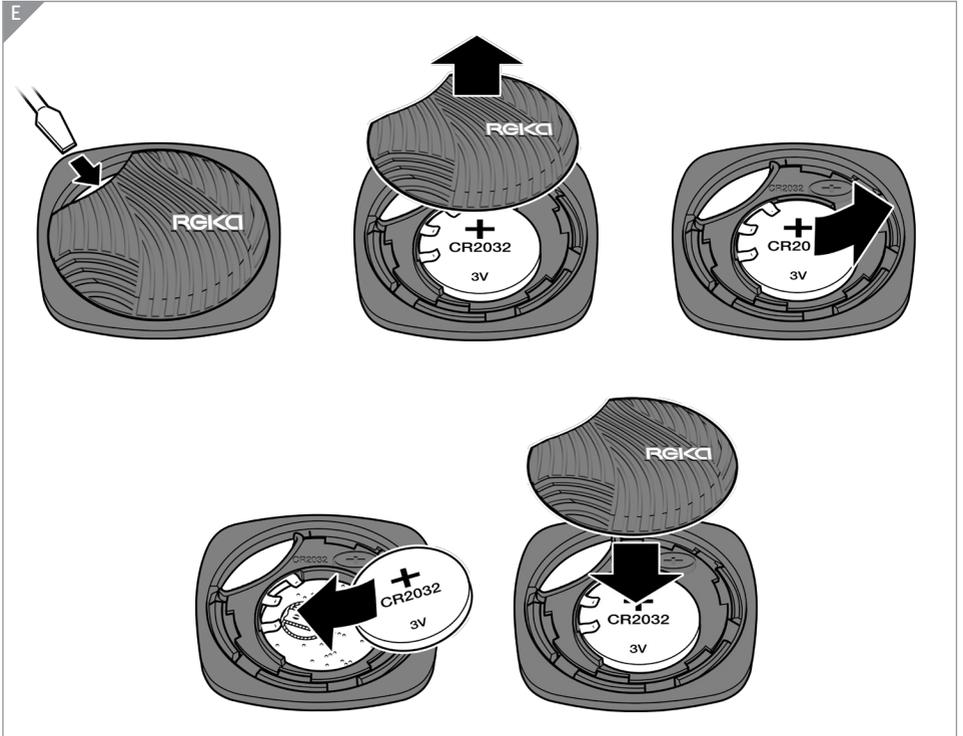

Once the cover is removed the battery will be pushed up from the terminal spring allowing you to take it out. Remove the empty battery. Insert a new CR2032 battery with the polarity matching the internal diagram, positive side up. Replace the battery cover lining up the clips and press firmly into place.

## Technical Data

### General

Approx Weight: 10g  
Approx Dimensions: 40mm x 40mm x 7.2mm  
IP Rating: IP53  
Alarm Volume: 85-90 dB  
IP Rating: IP53

### Battery

Battery Type: Li-Ion CR2032  
Capacity: 210mAh  
Use Time: Approximately 9 months

### Bluetooth

Bluetooth Ver: 5.0  
Frequency Range: 2.400GHz-2.483GHz  
Bluetooth Protocol: A2DP  
Bluetooth Range: 10m  
Bluetooth Name: REKA

## Declaration Of Conformity

Hereby, Qesh Ltd declares that this product is in compliance with:  
Directive 2014/53/EU.

The full text of the EU declaration of conformity is available at the following internet  
address: [www.qesh.co.uk](http://www.qesh.co.uk)

# Disposal Information

## Packaging



The card used in the packaging is made from widely recycled material. Dispose of the box in the council approved recycle bin. Check with your local authority or at [www.recyclenow.com](http://www.recyclenow.com) to see which items are collected in your area.

## Product

This product uses a CR2032 Li-Ion internal battery.

Do not dispose of batteries in your household waste.

Please contact your local authority for details on safe disposal.

- Never throw batteries into a fire or expose to excessive heat sources.
- If batteries are swallowed, please seek immediate medical attention.
- Always ensure correct +/- battery polarity when installing batteries.
- Do not recharge non-rechargeable batteries.

Batteries, should not be thrown away with your household waste. Contact your local authority waste disposal department, as they will be able to provide details of the recycling options available in your area.



Electrical and electronic equipment (EEE) contains materials, parts and substances, which can be dangerous to the environment and harmful to human health. Therefore waste electrical and electronic equipment (WEEE) must be disposed of correctly.



Equipment, which is marked with the WEEE logo (as shown on the left), should not be thrown away with your household waste. Contact your local authority waste disposal department, as they will be able to provide details of the recycling options available in your area.

## Warranty Conditions

Dear Customer,

**This warranty** offers you extensive benefits:

**Warranty period:** 3 years from the date of purchase.  
6 months for wear of parts and consumables under normal and proper conditions of use (e.g. Rechargeable batteries).

**Costs:** Free repair/exchange.  
Refundable postage cost.

**Hotline:** 01270 508538 (UK) - 11p/min from a BT landline.  
1800 995 036 (IE) - free phone service.  
Calls from mobiles may cost considerably more.

**Phone lines Available:** Monday to Friday, 9am to 5pm  
(excluding UK bank holidays).

Please contact our **AFTER SALES SUPPORT** by phone or email before sending in the device. This allows us to provide support in the event of possible operator error.

### In order to make a claim under the warranty, please send us:

- The completed warranty card with a copy of the original purchase receipt.
- The faulty device with all the accessories included within the packaging.

---

### This warranty does not cover damage caused by:

- **Accidental damage** or **unanticipated events** (e.g. Lightning, fire, water, etc).
- **Improper use** or **transportation**.
- **Disregard** of the **safety** and **maintenance instructions**.
- Other **improper treatment** or **modification** of the product.

After the expiry of the warranty period, you still have the possibility to have your product repaired at your own expense. If the repair or the estimate of costs is not free of charge you will be informed accordingly in advance.

This warranty does not affect your statutory rights. In the event that a product is received for repair, neither the service company nor the seller will assume any liability for data or settings possibly stored on the product by the customer.

---

# WARRANTY CARD



## BLUETOOTH TRACKER

Please contact our **AFTER SALES SUPPORT** by phone or email before sending in the device.  
This allows us to provide support in the event of possible operator errors.

12/2020



MODEL:

BTR-001

### AFTER SALES SUPPORT

**01270 508538 (GB) 1800 995 036 (IE)**

**enquiries@qesh.co.uk**

### PRODUCT CODE

**708543**

### SERVICE CENTRE

**Qesh LTD.  
B7, First Business Park,  
First Avenue, Crewe,  
Cheshire, UK.  
CW16BG.  
[www.qesh.co.uk](http://www.qesh.co.uk)**

Description of malfunction:

**Your details:**

Date and location of purchase: \_\_\_\_\_

Name: \_\_\_\_\_

Address: \_\_\_\_\_

Email: \_\_\_\_\_

Great care has gone into the manufacturing of this product and it should therefore provide you with years of good service when used properly. In the event of product failure within its intended use of the course of the first 3 years after the date of purchase, we will remedy the problem as quickly as possible once it has been brought to our attention. In the unlikely event of such occurrence or if you require any information about the product, please contact us via our helpline support services, details of which are to be found both on this user guide and on the product itself.



**PRODUCED IN CHINA FOR:**

QESH LTD. B7 FIRST BUSINESS PARK,  
FIRST AVENUE, CREWE,  
CHESHIRE. CW16BG.

Visit us at [www.qesh.co.uk](http://www.qesh.co.uk)

**AFTER SALES SUPPORT**

708543



01270 508538



1800 995 036



[www.qesh.co.uk](http://www.qesh.co.uk)

MODEL:

Bluetooth Tracker

12/2020

**3**

**YEAR  
WARRANTY**

